


Technical Data:

Power	4 x 1.5V AA alkaline batteries
Battery Location	Inside of the door
Material	Handles: Stainless steel quality SUS304 Sensor: PC
Metal Finishes	Silver, Matte Black
Emergency Opening Options	Emergency Opening with Mechanical cylinder
Locking Mechanism	Electro-mechanical locking mechanism
Door Thickness	35-60mm
System Software Compatibility	BIS Hotel
Storage Temperature	Workable -20°C~60°C: non-condensing environment
Tested Operating Temperature	Tested from -25°C~70°C
Mortise	Compatible with DIN-65 mortise
Supported RFID Standard	ISO 14443 A (MIFARE Classic)

Lockcase Dimensions:

DIN Lock Case Variants	DIN DB
DIN Lock Caes Widths	24mm/0.95inches
DIN Backset	65mm/2.56inches

DIN Lockcase

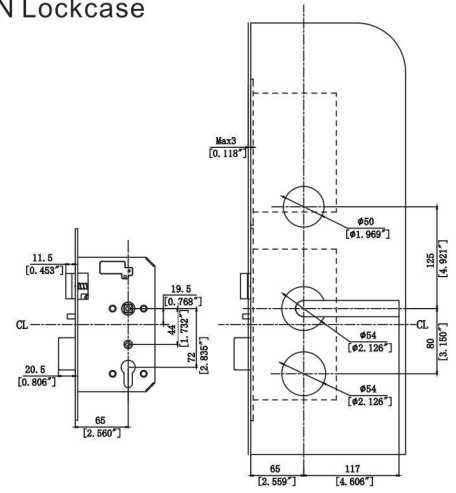

Guangdong Be-Tech Security Systems Limited

No. 17, Ronggui Technology Industrial Park
Keyuan 3rd Road, Shunde, Foshan
Guangdong, P.R.China

Tel: +86 757 28376123 | Fax: +86 757 28308823

E-mail: export@be-tech.com.cn | www.betechlock.com

Specifications may change without notice.